

Shanklin[®] Automatic L-Sealers

Consistent Quality, Performance, and Reliability in a Flexible L-Seal Design



Shanklin Automatic L-Sealer Options at a Glance

Infeed Options


By selecting just the right combination of options, you can customize your Shanklin A-Series Automatic L-Sealer for the ultimate performance, efficiency and value!



Adjustable Flight
Lug Infeed



Product Spacing
Infeed Conveyor

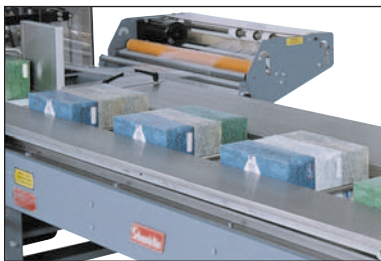

Adjustable Flight
Bar Infeed

Options	A-26A	A-27A	A-28A
Adjustable Flight Bar Infeed Conveyor	X	X	
Adjustable Flight Lug Infeed Conveyor	X	X	
Product Separating Infeed Conveyor	X	X	X
Closing Discharge Conveyor	X	X	X
Product Pressure Rollers over the Discharge Conveyor	X	X	X
EZ Load Compact Centerfolder	X	X	X
Dual Roll Compact Centerfolder	X	X	X
Dual Infeed Eyes	X	X	X
Print Registration	X	X	X
Discharge Rollers for Light Product	X	X	X
Casters	X	X	X
SmartWire Seal Jaws (in lieu of Hot Knife Jaws)	X	X	
EZ Film Thread Infeed Table	X	Standard	

For more information, please contact your Shanklin distributor.

Shanklin® Automatic L-Sealers

Meet the Shanklin “A” Team: Models A-26A, A-27A, and A-28A

The Shanklin A-Series of compact, rugged, and versatile Automatic L-Sealers offers gentle product feed and straight line product flow that make them ideally suited for handling a wide variety of products. A-Series machines feature conveyor-fed automatic operation and are capable of processing up to 35 packages per minute, plus the L-Seal design provides great flexibility and quick product change. Each will accept randomly spaced product, fed either automatically or by hand.

- **Reliable**—Equipped with programmable controllers for simplicity of wiring and ease of troubleshooting; facilitates easy machine set-up and adjustment
- **Flexible**—Photoelectric sensor system automatically compensates for package length change; automatic film advance system allows light, flexible products to be fed through the machine with ease
- **Versatile**—Offers easy product and size changeover and the ability to handle virtually any type of film (depending on sealing system); most features are fully adjustable for maximum convenience
- **Safe**—Electrical controls are UL-listed (for meeting the highest safety standards); sealing area is protected by an electrically interlocked transparent hood through which the sealing process may be safely observed; hood may be easily lifted for full access when necessary
- **Secure**—Password protection capability safeguards sensitive machine functions
- **Easy to use and maintain**—EZ load unwind feature offers easy loading and threading capability; machine controls are located in front for quick and easy access

Standard Value-Added Features



User Friendly
Control Panel



Color Coded
Touch Screen



Automatic
Film Puller



EZ Load
Film Unwind

The Perfect Partner

Pair your Shanklin Automatic L-Sealer with a Shanklin Shrink Tunnel for superior wraps every time!




T-7H

A-27A

The Shanklin Automatic L-Sealers: Quality Comes Standard

Model A-26A

The A-26A features adjustable height seal jaws and can automatically wrap a wide range of products, including high profile or short length items, at speeds up to 35 packages per minute. It is also available in a USDA approved model.

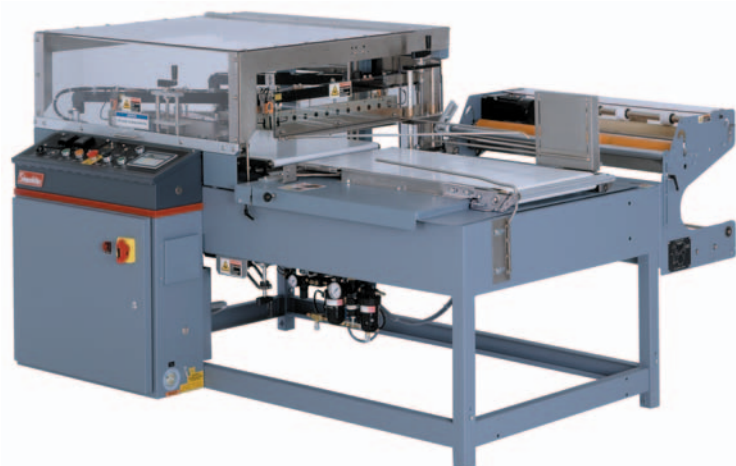


Model A-27A

The A-27A possesses all of the same features as the A-26A, but with slightly larger allowances in its maximum seal size, product size, and film width specifications. EZ film threading is standard on the A-27A, which allows operators to move machine components for full access and visibility when threading film. The A-27A is also available in a USDA approved model.

Model A-28A

The large-capacity workhorse model of the A-Series, the A-28A features adjustable height seal jaws specially designed for products too large to fit through the A-26A or A-27A, and is equipped with a heavy-duty discharge conveyor to wrap much heavier product than most automatic L-Sealers can handle.

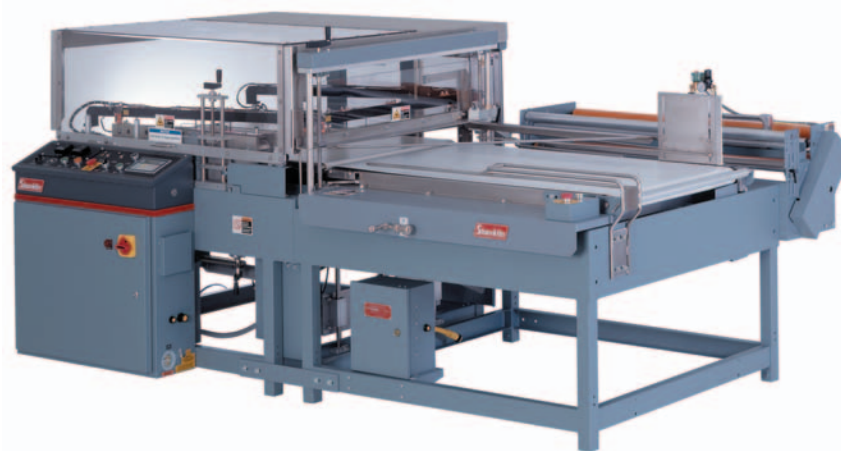

Shanklin Automatic L-Sealer Model Specifications

	Model A-26A	Model A-27A	Model A-28A
Seal Size	15"W x 21"L	21"W x 33"L	31"W x 43"L
Max. Product Height	5 1/2"	8"	10"
Min. Product Length	4" Standard 1 1/2" with optional closing conveyor	4" standard 2 3/4" with optional closing conveyor	7 1/2" standard 5" with optional closing conveyor
Max. Product Length	20"	31"	41"
Max. Film Width (Folded)	24"	30"	36"
Max. Film Width (Flat)	44" with compact centerfolder		60" with large compact centerfolder
Conveyor Height	Adjustable 31 1/2" – 37 1/2"		
Packaging Speeds*	Up to 35 packages per minute (standard)		25 packages per minute maximum
Longitudinal and Transverse Seal	Hot knife jaws or SmartWire		Hot knife jaws
Power	230V, 15 Amps, 60 Hz, 1 phase		
Compressed Air	0.5 C.F.M. free air at 60 psi		
Safety Devices	<ul style="list-style-type: none"> Emergency stop button instantly stops all machine functions until manually reset A transparent hood, interlocked electrically with the automatic sequencing circuit, covers the sealing area; gas cylinders support the hood when it is lifted to allow access Film clamp proximity sensors ensure safe sealing arm jaw closure 		<ul style="list-style-type: none"> Multiple safety interlocks Tamper-resistant controls Low voltage sensors and actuators

*Dependent on product and application.

U.S. Patent Nos. R30,010; 4,219,988; 4,339,093; 4,419,855; 5,097,939; 5,131,213; 5,321,230; and pending.

Specifications on all machines subject to change without notice.

Some photos may show accessories not part of the basic machine.

USDA APPROVED MODELS AVAILABLE

A-26A/A-27A/A-28A Plan View

